



parametry (zgodnie z wykresem p-t)

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+90°C	+1°C	1,0 MPa	ISO 228 / EN 10226

dane techniczne

indeks	wielkość	masa [kg]	DN	d	L	H	H _i	Q[m³/h]
01-400-0150-000	½"	0,25	15	RP½	65	5,0	70,0	1,8
01-400-0200-000	¾"	0,36	20	RP¾	74	5,0	82,7	3,6
01-400-0250-000	1"	0,66	25	RP1	85	7,0	103,5	6,3
01-400-0320-000	1¼"	1,01	32	G1¼	103	11,0	77,5	10,8
01-400-0400-000	1½"	1,47	40	G1½	115	12,0	85,0	14,4
01-400-0500-000	2"	2,08	50	G2	145	13,5	98,7	24,3

Wymiary w mm.


* Minimalny przepływ zgodny z DIN3546 część 1.

materiały

KADŁUB, TRZPIEŃ: mosiądz

USZCZELKA GŁOWICY, TRZPIENIA: EPDM

UCHWYT: tworzywo sztuczne

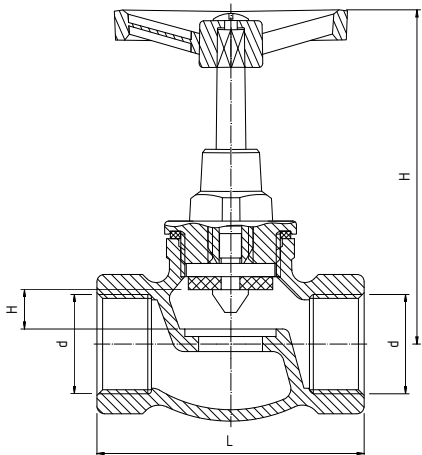

wykras p-t

